

MANUAL SECTION	ISSUE DATE	AUTHORISED	REPLACES	PAGE
Construction Products	March 2010	PM	March 2003	

## Joint Safe Tape

### DESCRIPTION:

Joint Safe tape is a butyl self adhesive tape used to provide a bond-breaking joint across cracks and joints. It is highly elastic.

### FEATURES


- Split backing tape
- Self adhesive
- Flexible / high elongation
- 15m roll x 85mm wide
- Low profile

### BENEFITS

- Easy to apply; enables 90° angles to be formed.
- Easy to apply
- Allows movement in joint area
- Easy to handle
- Minimal joint appearance.

### NORMAL END USES:

- Over concrete cracks
- Plywood joints
- On metal roofs and gutters
- Normally, almost always, overlaid with a fibreglass composite bandage.
- Corner joints.

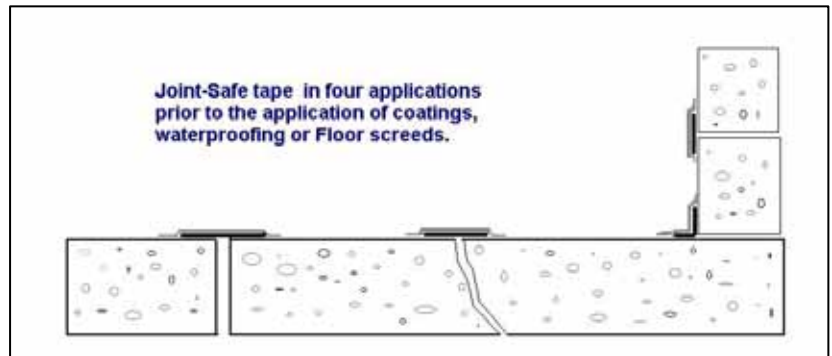

### Limitations

Whilst JST will help alleviate movements in substrates; it cannot eliminate them and excessive movement may still cause the joint to rupture or show signs of vertical or lateral movement in the overlaying system.

### Installation

Identify the joints/ cracks that need additional protection. Prepare the surface ready for the overlaying composite. (clean, dry, condensation free). Priming:


Aquaguard systems: Install the first coat cure, then apply JST.

Metal decks: Prime the joint safe tape area with Neoprime

Waterbased systems: Prime the joint safe tape area with Neoprime.

Lay out the JST without wrinkles the roll with a hand roller to ensure adhesion.

Overlay with the appropriate composite system.

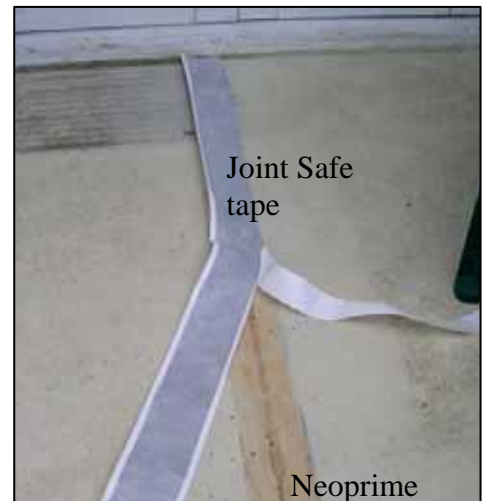

No warranty either expressed or implied or statutory is made by NUPLEX in this document except as expressly stated in any sale and purchase agreement entered into between NUPLEX and the buyer. CERTIFIED ISO 9001 REG. NO. 158 This document is a technical data information sheet The description of the product or products and the properties of the product or products contained in this document is for the sole purpose of identifying the product or products and describing their property or properties and does not constitute a warranty that the product or its properties shall conform to that description; nor is the description of the product and/or its properties a warranty by NUPLEX that the goods are suitable for a particular purpose.

**NUPLEX CONSTRUCTION PRODUCTS** [WWW.NUPLEXCONSTRUCTION.CO.NZ](http://WWW.NUPLEXCONSTRUCTION.CO.NZ)  
PO Box 1 2841, Penrose, Auckland Telephone: 0-9-579 2029, Fax: 0-9-525 3709, Email: [bpdsales@nuplex.co.nz](mailto:bpdsales@nuplex.co.nz)

<b>H A M I L T O N</b>	<b>P A L M E R S T O N</b>	<b>N O R T H</b>	<b>W E L L I N G T O N</b>	<b>C H R I S T C H U R C H</b>
Telephone: 0-7-847 8658	Telephone: 0-6-353 3685	Telephone: 0-4-477 7040	Telephone: 0-4-477 7039	Telephone: 0-3-366 6802
Fax: 0-7-847 3766	Fax: 0-6-353 3632	Fax: 0-4-477 7039	Fax: 0-3-379 0279	