

UZIN Primer and Levelling Compounds

The reliable base for floor coverings



available at:

nuplex
Construction Products

Intelligent Resources. **UZUN**[®]

The right primer and levelling compound for every surface!



Proper and professional preparation of surfaces requires high quality products.

Screeds, existing finishes, wood flooring – each substrate puts its own demands on the type of preparation. In addition to the expertise and materials knowledge of the floor layer, the choice of suitable products is also important.

According to the area of use and the specification, a variety of primer, smoothing and levelling compounds are available from UZIN: self-levelling or low-slump, normal- or rapid- setting, for thin- or thick- coat application, for mineral substrates and wood.

Whether you place greatest value on speed, environmental consciousness, reliability or mechanical load capacity – with UZIN you are always playing safe!

The UZIN products and Nuplex adhesives are tested as a total system and satisfy the most wide-ranging requirements and demands.

Our product recommendations for all substrate types:*

Substrate	Primer		Levelling & smoothing compound			
	PE 280	PE 520	NC 160	NC 160 + PE 520	NC 880	NC 880 + PE 280
smooth and dense concrete floors		●			●	
compacted cement screeds		●	●		●	
porous concrete, sand / cement screeds		●			●	
wooden particle board	●			●	●	
mastic asphalt	●			●	●	
metal surfaces	●			●	●	
badly sanded old mastic asphalt floors	●			●	●	
well bonded, waterproof residues of adhesives	●				●	
well bonded residues of leveling compounds	●				●	
well bonded 2-part adhesive residues	●					■
well bonded synthetic coatings	●					■
soundly fixed ceramic tiles	●				●	
natural stone	●				●	
reworked stone	●				●	
terrazzo	●				●	
heated sub-floors	●	●	●	●	●	●

● suitable ■ suitable in conjunction with primer PE 280

* Please also refer to the relevant UZIN Product Data Sheets

Very low emission, self-levelling and smoothing compounds

↑ SMOOTHING COMPOUND

UZIN NC 160

Very low emission, self-levelling cement flooring compound for thickness up to 20 mm.

- + the best application properties
- + for thickness up to 20 mm
- + excellent flow properties and pumpable
- + easy to rub down
- + high strength
- + rapid setting
- + very low stress
- + GISCODE ZP 1/low chromate content (TRGS 613)
- + EMICODE EC 1/very low emission



↑ GYPSUM LEVELLING COMPOUND

UZIN NC 880

Rapid repair compound for fine smoothing and filling work prior to covering installation

- + From a „feather-edge“ up to 4 mm thickness
- + No primer required
- + Extremely rapid drying due the chemical conversion of the moisture content
- + Excellent surface finish
- + Fine aggregate, no visible trowel marks
- + Supplied in a practical plastic drum



↑ LOW-SLUMP SMOOTHING COMPOUND


UZIN NC 182

Low-slump, fine-textured and very rapid setting repair mortar as a universal filling and smoothing compound.

- + very rapid-setting, time-saving
- + universal use
- + from "feather-edge" to thick-coat application
- + adjustable consistency
- + ideal application properties
- + easy to rub down
- + excellent absorbency
- + GISCODE ZP 1/low chromate content (TRGS 613)



UZIN SYSTEM RECOMMENDATION FOR RUBBER OR VINYL FLOOR INSTALLATION

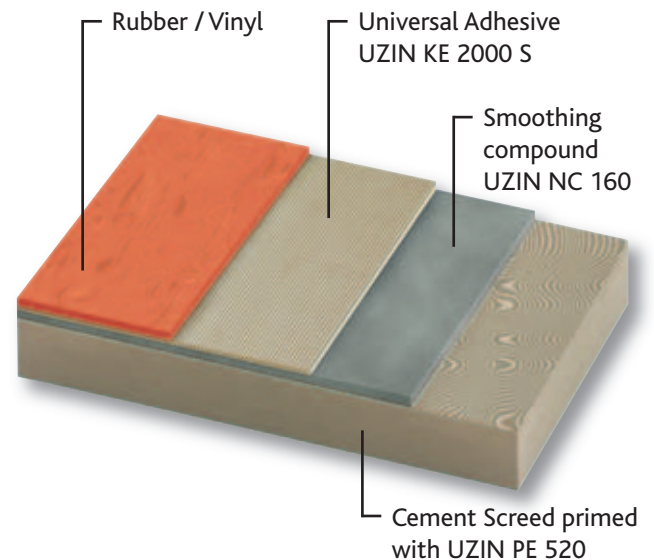

Primary treatment before levelling



UZIN offers you the right quality for proper and professional surface preparation!

↑ SUPER-FAST PRIMER

UZIN PE 280

Dispersion primer with carbon technology for smooth and dense surfaces

- + Ready to use
- + Film-forming
- + Ideal bonding agent on dense surfaces
- + Good adhesion
- + Paste consistency, therefore also suitable for vertical surfaces
- + High-speed construction product
- + Solvent-free



↑ WET PRIMER

UZIN PE 520

Special dispersion wet-in-wet primer for absorbent, cement-based substrates prior to applying UZIN cement levelling compounds and mortars.

- + Binds dust
- + Reduces surface absorbency
- + Increases bond strength
- + Neutral odour
- + Solvent-free



UZIN | A Brand of UFLOOR Systems

available at:

nuplex
Construction Products

Nuplex Construction Products

Head Office: 719 Great South Rd | Penrose | Auckland, NZ | PO Box 12841 Penrose

Phone 64-9-580 0883 | Fax 64-9-525 3709

Free Phone 0508-882-288 Defaults to your NZ region | Free Fax 0508-553-344 Defaults to your NZ region

National Orders use 0508-Numbers